

NOVOTURN
Multi-turn Sensor
Non-contacting

MC1-2800
IO-Link
Industrial



Special Features

- Non-contacting, magnetic
- Long life
- Measuring range 15840° (44 turns)
- True-Power-On system: counts turns even when not powered. Patented non-volatile technology does not require gears or batteries
- Available with push-on coupling or marked shaft
- Easy mounting
- Protection class IP54 up to IP67
- Resolution 16 bits per revolution
- Other configurations see separate data sheets

Applications

- Mechanical engineering
- Mobile machinery
- Driveline or steering systems
- Wire-actuated encoders
- Gate drives
- Motor sports

Multi-turn sensors that use the GMR technology (giant magneto resistance), provide absolute position values, do not require any reference signals and need no power supply or buffer battery for detecting the revolutions. The fact that rotations are detected even unpowered and the sensor does not lose its position information during a power failure, makes the MC1-2800 with its diameter of only 30 mm an extremely compact real True-Power-On rotary sensor.

The sensor operates magnetically and thus contactless allowing an extremely long life.

The sensor is able to detect angular positions over up to 44 revolutions with a high resolution up to 16 bits per revolution.

Description

Material	Housing: high grade, temperature resistant plastic PPS-GF Shaft: SS X8CrNiS18-9 1.4305 / AISI 303
Mounting	With 2 screws M4 and washers
Fastening torque of mounting	140 ± 40 Ncm
Bearing	Sintered bronze bushing
Electrical connection	Cable 4x 0.5 mm ² (AWG 20), TPE, unshielded / Connector M12x1, A-coded with cable L = 0.15 m

Mechanical Data

Dimensions	See dimension drawing
Mechanical travel	Continuous
Permitted shaft load static or dynamic	20 N (axial / radial)
Torque	Typ. ≤ 3 Ncm Depending on the environmental temperature and standstill time, the necessary force for the initial operating of the shaft may increase
Weight (w/o connection)	approx. 50 g

Ordering Specifications

Ordering Specifications

- Preferred types printed in bold
- Delivery time up to 25 pcs. within 10 working days EXW

• Best low-volume pricing

Interface

A: IO-Link

Interface parameters

10: 1x position (SSP 4.2.1 Ed.2) , rising cw

11: 1x position, rising cw

12: 1x position, 1x speed, rising cw

Other process data on request

Electrical connection

252: Cable, 4-pole, unshielded, L = 1 m

256: Cable, 4-pole, unshielded, L = 3 m

260: Cable, 4-pole, unshielded, L = 5 m

551: Connector M12x1, 4-pin, unshielded, with cable, L= 0.15 m

Cable versions and assembled connectors on request

M C 1 - 2 8 3 2 - 2 4 4 - A 1 1 - 2 5 2

Series

Mechanical version

2802: 6 mm shaft with flattening, IP54

2832: 6 mm shaft with flattening, IP65

2862: 6 mm shaft with flattening, IP67

2821: push-on coupling, IP54

2841: push-on coupling, IP65



2871: push-on coupling, IP67

Other shaft configurations on request

Number of turns for output characteristic

244: 44 turns = 15840°

Drawing

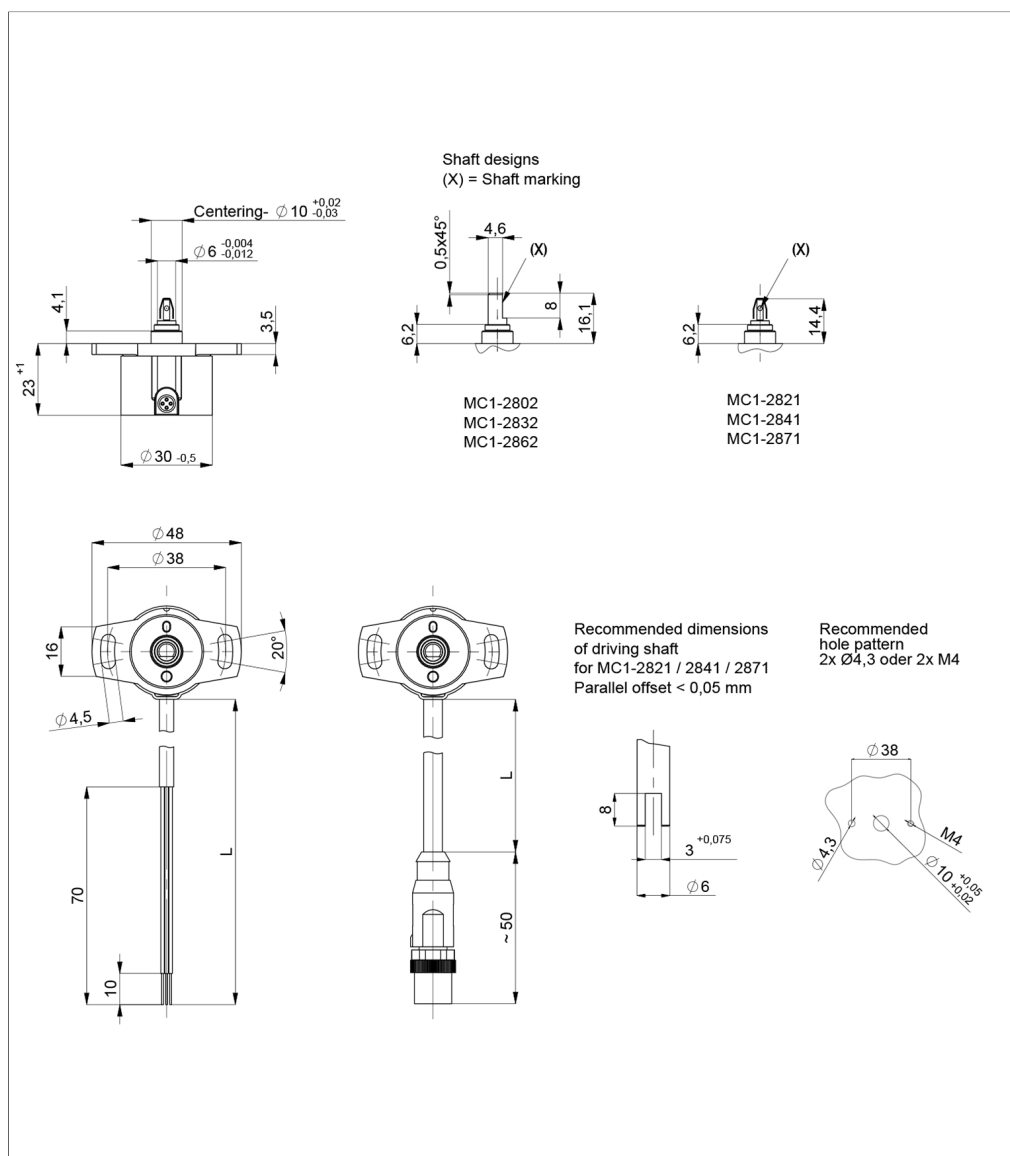

When the marking of the shaft is pointing towards the electrical outlet, the sensor output is located on an integer turn position.


Type	MC1-28__-2__-A__-__-__ IO-Link
Measured variables	Position, speed, temperature and supply voltage
Measuring range	44 turns = 15840°
Measuring range speed	0 ... 546 rpm
Number of channels	1
Protocol	IO-Link Spec V1.1 to IEC 61131-9, Smart Sensor Profile Ed. 2 Digital Measuring Sensor SSP 4.2.1 (V1.0 compatible)
Programmable parameters	e.g. Null point offset, resolution, rotating direction, switches, work area, operating modes
Condition monitoring functions	Statistical data on temperature, operating time, supply voltage, running performance
Diagnosis	activated (in case of error, position signal is outside of the plausible signal range)
Resolution position (across 360°)	A11/A12: 16 bits, A10: 0,01°/LSB
Resolution speed	0.1°/s
Update rate	1 kHz
Signal propagation delay	< 0.2 ms
Transfer rate	COM 3 (230.4 kBaud)
Frame type	2.2
Minimum cycle time	1 ms
Linearity *	≤ ±1°
Repeatability *	≤ ±0.1°
Hysteresis *	≤ ±0.5°
Temperature error	±0.36°
Supply voltage Ub	24 VDC (16 ... 30 VDC)
Current consumption w/o load	≤ 30 mA @24 V
Power drain w/o load	< 0.72 W
Polarity protection	yes (supply lines and outputs)
Short circuit protection	yes (output vs. GND and supply voltage up to 40 VDC)
Overvoltage protection	36 VDC (permanent)
Insulation resistance (500 VDC)	≥ 10 MΩ
	*) For the MC1-2821/2841/2871 models with push-on coupling, the values may change (up to a factor of 2) due to the plastic deformation of the coupling spring.
Environmental Data	
Max. operational speed	800 rpm
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class DIN EN 60529	IP54 / IP65 / IP67
Operating temperature	-40 ... +85°C -25 ... +85°C (connector M12)
Insensitivity to magnetic DC fields	< 15 mT
Life	> 50 Mio. movements (mechanically)
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	591 years
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
Conformity/Approval	CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/
EMC Compatibility	
IO-Link Interface and System	V1.1.3
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m
EN 61000-4-4 Fast transients (burst)	2 kV
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.
EN 55016-2-3 Radiated disturbances	Industrial and residential area

Important:



While operation, care should be taken not to rotate the sensor shaft below 0° or above 5760°. Refer to install guide.

Connection Assignment

Signal	Cable code 2_ _	Connector code 5_ _
Supply voltage Ub (L+)	BN	Pin 1
GND (L-)	WH	Pin 3
C/Q	YE	Pin 4
Do not connect (alt. GND)	GN	Pin 2



Sensor Mounting

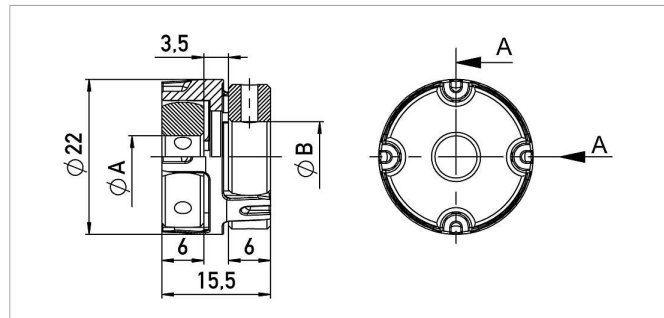

Z-106-G-__

Backlash-free, double cardanic shaft coupling
for Ø6 mm to Ø6 mm, Ø6.35 mm or Ø10 mm,
mounting via 2 threaded pins with internal
hexagon

Material	Aluminium, PEEK
----------	-----------------

Operating temp. -40 ... +160°C

Transferable ≤ 1 Nm



torque

Displacement rad. ≤ 0.1 mm, angl. $\leq 0.45^\circ$

P/N	Type	ØA / ØB [mm]
400103910	Z-106-G-6	6 / 6
400103912	Z-106-G-6,35	6 / 6.35
400103913	Z-106-G-10	6 / 10

Connector System

M12



EEM-33-35/36/37

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67, open ended

Plug housingPA

Cable sheathPUR, Ø = max. 6 mm, -40 ... +85°C (fixed)

Lead wiresPP, 0.34 mm²

P/N	Type	Length
400056135	EEM-33-35	2 m
400056136	EEM-33-36	5 m
400056137	EEM-33-37	10 m

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

C

Suited for applications in dragchains

UL

UL - approved


CAN-Bus

Connecting Options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68
- Ordering codes of standard versions see ordering specifications



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
- On request



Tyco AMP Super Seal

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
- On request



Deutsch DTM 04

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



ITT Cannon Sure Seal connector

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request

Novotechnik U.S., Inc.
155 Northboro Road

Southborough, MA 01772
Phone 508 485 2244
Fax 508 485 2430
info@novotechnik.com
www.novotechnik.com



© Apr 28, 2025