


**NOVOTURN**  
**Multi-turn Sensor**  
**Non-contacting**

**MB1-3600**  
CAN SAE J1939  
**Mobile Applications**

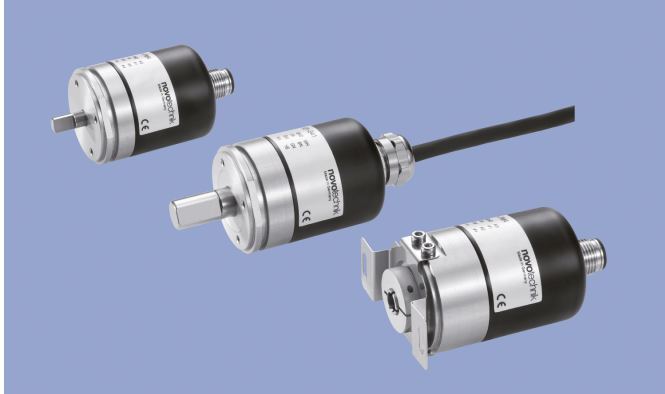

**Special Features**

- Non-contacting, magnetic
- Long life
- Measuring range 15840° (44 turns)
- True-Power-On system: counts turns even when not powered. Patented non-volatile technology does not require gears or batteries
- Solid shaft or hollow shaft
- Resolution 16 bits per revolution
- Protection class IP67, IP69K
- Exceeds European E1 requirements
- Other configurations see separate data sheets

**Applications**

- Mechanical engineering
- Mobile machinery
- Driveline or steering systems
- Wire-actuated encoders
- Gate drives
- Motor sports

Non-contacting Rotary Sensor in very robust design including a double bearing system in a compact OD 36 mm full metal housing. The magnetic True-Power-On Multi-Turn utilizes the GMR technology (Giant Magneto Resistance) for measurements of 44 revolutions. The heavy-duty version in IP69K ingress protection version is well suited for extreme environment applications including high bearing loads. The semi-hollow shaft version with its integrated stator coupling obsoletes a costly separate shaft coupling.

Description			
Type	Ø6 mm shaft MB1-3601-_____-	Ø10 mm shaft Heavy Duty MB1-3624-_____-	Ø6 mm hollow shaft MB1-3607-_____-
Material	Flange: aluminium AlSiMgBi, anodized Cover: Stahl, verzinkt, ST 12 1.0330 Shaft: SS X10CrNiS18-9 1.4305		Flange: aluminium AlSiMgBi, anodized Cover: steel, galvanized ST 12 1.0330 Shaft: SS X10CrNiS18-9 1.4305 Coupling: SS X10CrNiS18-8 1.4310
Mounting	With 3 mounting clamps Z1-15 (included in delivery) or via frontal thread 4 x M3		Stator coupling
Bearing	Ball bearings		
Electrical connection	Connector M12x1, A-coded		

Mechanical Data			
Type	Ø6 mm shaft MB1-3601-_____-	Ø10 mm shaft Heavy Duty MB1-3624-_____-	Ø6 mm hollow shaft MB1-3607-_____-
Dimensions	See dimension drawing		
Mechanical travel	Continuous		
Weight (w/o connection)	approx. 100 g		
Torque*	Typ. 0.3 Ncm	Typ. 3 Ncm	Typ. 0.5 Ncm
Permitted shaft load static or dynamic	40 N (axial) / 50 N (radial)	100 N (axial / radial)	40 N (axial) / 50 N (radial)

\*) Depending on the environmental temperature and standstill time, the necessary force for the initial operating of the shaft may increase.

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

Interface

J: CAN SAE J1939

Interface parameters

1: 1x position, 1x speed

Baud rate

3: 500 kBaud

4: 250 kBaud

Electrical connection

FM5: Connector M12x1, 5 pin

Cable versions and assembled connectors on request

M

B

1

-

3

6

0

1

-

2

4

4

-

J

1

4

-

F

M

5

Parameterization

244: 44 turns = 15840°

Mechanical version

3601: Synchro flange, shaft Ø 6 mm x 12,5 mm

3624: Synchro flange, heavy duty version, shaft Ø 10 mm x 20 mm

3607: Round flange, hollow shaft Ø 6 mm

Other flange and shaft designs on request



Series

Accessories included in delivery

3x fixing clamp Z1-15

Page 2

## Drawing

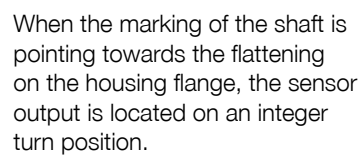

## Technical Data




Type	MB1-36-_-_-_-J-_-_-_- CAN SAE J1939		
Measured variables	Position, speed, temperature and supply voltage		
Measuring range	44 turns = 15840°		
Measuring range speed	0 ... 546 rpm		
Number of channels	1		
Protocol	CAN SAE J1939		
Programmable parameters	e.g. Preset, counting direction, resolution, baud rate, transmit mode, transmit cycle, source address		
Condition monitoring functions	Operating time, temperature, supply voltage		
Diagnosis	activated (in case of error, position signal is outside of the plausible signal range)		
Source Address	128 ... 247 (dynamic address claiming)		
Baud rate	250, 500 kBaud		
Signal propagation delay	< 0.3 ms		
Resolution position (across 360°)	16 bits		
Resolution speed	0.1°/s		
Linearity	≤ ±1°		
Repeatability	≤ ±0.1°		
Hysteresis	≤ ±0.5°		
Temperature error	±0.36°		
Supply voltage Ub	12/24 VDC (8 ... 32 VDC)		
Current consumption w/o load	≤ 60 mA		
Overvoltage protection	45 VDC (permanent)		
Polarity protection	yes (supply lines and outputs)		
Short circuit protection	yes (all outputs vs. GND and supply voltage)		
Insulation resistance (500 VDC)	≥ 10 MΩ		
Bus termination internal	w/o (internal load resistance 120 Ω on request)		
Environmental Data			
Type	Ø6 mm shaft MB1-3601-_-_-_-_-_-_-_-	Ø10 mm shaft Heavy Duty MB1-3624-_-_-_-_-_-_-_-	Ø6 mm hollow shaft MB1-3607-_-_-_-_-_-_-_-
Max. operational speed	12,000 rpm	6,000 rpm	12,000 rpm
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, Amax = 0.75 mm		
Shock IEC 60068-2-27	50 g, 6 ms		
Protection class ISO 20653	IP65 (shaft side) IP67 (housing incl. electronics)	IP67 (shaft side) IP69K (housing incl. electronics)	IP65 (shaft side) IP67 (housing incl. electronics)
Operating temperature	-30 ... +85°C		
Insensitivity to magnetic DC fields	< 15 mT		
Bearing lifetime	typ. > 100 Mio. movements		
Functional safety	If you need assistance in using our products in safety-related systems, please contact us		
MTTF (IEC 60050)	441 years		
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components		
Conformity/Approval	CE, UKCA see <a href="https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk">https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk</a> WEEE see <a href="https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/">https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/</a>		
EMC Compatibility			
ISO 13766-1 Construction machinery			
ISO 14982 Agricult./forestry machines			
Emission/Immunity E1	E1 compliant		
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV		
EN 61000-4-3 Electromagnetic fields (RFI)	30 V/m		
EN 61000-4-4 Fast transients (burst)	1 kV		
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.		
EN 55016-2-3 Radiated disturbances	Industrial and residential area		

### Important:



While operation, care should be taken not to rotate the sensor shaft below 0° or above 5760°. Refer to install guide.

### Connection Assignment

Connection Assignment	
Signal	Connector
Supply voltage U <sub>b</sub>	Pin 2
GND	Pin 3
CAN_H	Pin 4
CAN_L	Pin 5
CAN_SHLD	Pin 1
	Connect cable shielding to protection earth (Industrial/CE) or GND (mobile applications)



## Sensor Mounting

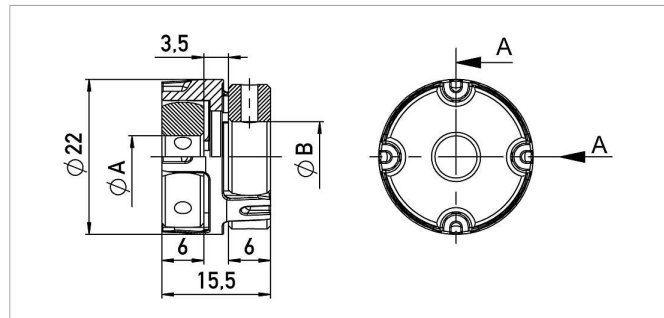

Z-106-G-\_\_

Backlash-free, double cardanic shaft coupling  
for Ø6 mm to Ø6 mm, Ø6.35 mm or Ø10 mm,  
mounting via 2 threaded pins with internal  
hexagon

Material	Aluminium, PEEK
----------	-----------------

Operating temp. -40 ... +160°C



Transferable  $\leq 1$  Nm

torque

Displacement rad.  $\leq 0.1$  mm, angl.  $\leq 0.45^\circ$ 

P/N	Type	ØA / ØB [mm]
400103910	Z-106-G-6	6 / 6
400103912	Z-106-G-6,35	6 / 6.35
400103913	Z-106-G-10	6 / 10

Connector System  
M12





**EEM-33-52**  
M12x1 Mating female/male connector, 5-pin, straight, A-coded, with molded cable, IP67, shielded (shield on knurl), CAN-Bus

Plug housing PUR  
Cable sheath PUR, Ø = 6.7 mm, -25 ... +90°C (plug/socket) -20 ... +80°C (cable)

Lead wires PE, 2x0.25 mm<sup>2</sup>+2x0.34 mm<sup>2</sup>

P/N	Type	Length
400106373	EEM-33-52	5 m





**EEM-33-49/51**  
M12x1 Mating female connector, 5-pin, straight, A-coded, with molded cable, IP67, shielded (shield on knurl), open ended

Plug housing TPU  
Cable sheath PUR, Ø = 6.7 mm, -25 ... +90°C (socket) -20 ... +80°C (cable)

Lead wires PE, 2x0.25 mm<sup>2</sup>+2x0.34 mm<sup>2</sup>



P/N	Type	Length
400106368	EEM-33-49	2 m
400106371	EEM-33-50	5 m
400106372	EEM-33-51	10 m



**EEM-33-73**  
M12x1 Mating female connector, 5-pin, straight, A-coded, with coupling nut, screw termination, IP67, shieldable, CAN bus

Plug housing Metal, -40 ... +85°C  
For wire gauge 6 ... 8 mm, max. 0.75 mm<sup>2</sup>

P/N	Type
400005645	EEM-33-73





**EEM-33-45**  
M12x1 splitter / T-connector, 5-pin, A-coded, IP68, 1:1 connection, female - male - female, CAN-Bus

Plug housing PUR, -25 ... +85°C

P/N	Type
400056145	EEM-33-45

Connector System

M12



<b>EEM-33-47</b>	
M12x1 terminating resistor, 5-pin, A-coded, IP67, 120 Ω resistance, CAN-Bus	
Plug housing	PUR, -25 ... +85°C
<b>P/N</b>	<b>Type</b>
400056147	EEM-33-47

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

C

Suited for applications in dragchains

UL

UL - approved

CAN-Bus



Novotechnik U.S., Inc.  
155 Northboro Road

Southborough, MA 01772  
Phone 508 485 2244  
Fax 508 485 2430  
[info@novotechnik.com](mailto:info@novotechnik.com)  
[www.novotechnik.com](http://www.novotechnik.com)



© Apr 29, 2025